



Replacement
Warranty

TRAILING EDGE DIMMERS ROTARY & PUSH BUTTON MTD350VAR/MTD350VAP

TRAILING EDGE DIMMERS



Rotary

Model MTD350VAR

- Fit most branded switch plates
- No neutral required
- Soft start
- Suitable for 1-way or 2-way operation
- Overheating protection
- Over current protection
- Full short circuit protection
- Minimum brightness adjustable





Push Button

Model MTD350VAP

- Fit most branded switch plates
- No neutral required, Soft start
- Suitable for 1-way operation only
- Additional button cover included
- Overheating protection
- Over current protection
- Full short circuit protection
- Minimum brightness adjustable


WIRING DIAGRAMS

Rotary

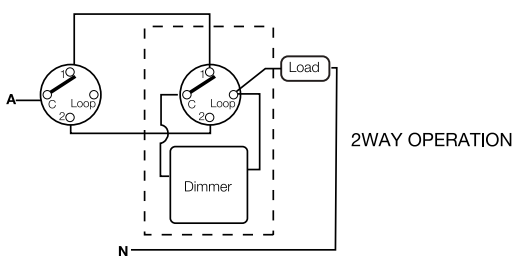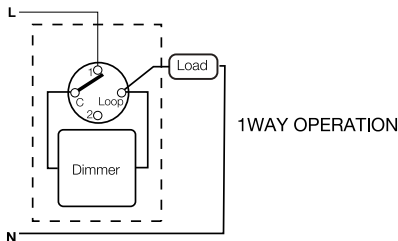

- Martec dimmers are a compact, modular dimming mechanism rated at 350W, and designed for universal load compatibility.
- The unit utilises powerful and sophisticated dimming technology to provide full control of almost any type of load. Used to control loads such as LED, incandescent lamps, 240V halogen lamps, dichroic lamps and low voltage lighting that uses iron-core or electronic transformers.
- The *Push Button* model incorporates on/off switching and dimming control into one mechanism.
- The dimming performance is optimised to ensure smooth, linear dimming across the control range.
- The *Rotary Dial* model is a separately switched unit that utilises sophisticated dimming technology to provide full control of a wide range of load types.

Push Button

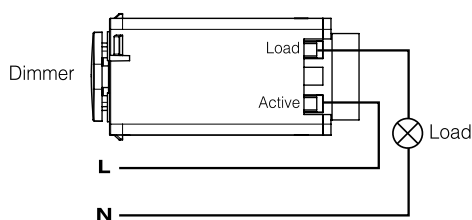

FEATURES

- Dimming: 2% to 100%*
- Design & optimised for dimmable LED lamps & fittings
- Fits into most standard branded wall plates
- 2 wire design
- Suitable for most dimmable 240V fixtures and globes
- Also works with most magnetic or dimmable electronic transformers
- Soft start for improved lamp life
- Detects the load type and selects either leading or trailing edge as required



Approval No: SAA202495
Approval No: SAA202361

TRAILING EDGE DIMMERS ROTARY & PUSH BUTTON



SPECIFICATIONS

Rotary

Dimming method	Trailing edge
Supply voltage	240V AC ~ 50Hz
Load wattage	10-350W (1.5 A max)
Ta	-10 + 40°C 25g

Push Button

Dimming method	Trailing edge
Supply voltage	240V AC ~ 50Hz
Load wattage	10-350W (1.5 A max)
Ta	-10 + 40°C 25g

MULTI-GANG RATING

Number of dimmers	Max. Load per dimmer
1	350W
2	250W
3	200W

INSTALLATION

Installation	By licensed electrician only
Warranty	1 year replacement warranty

*For further information regarding warranty terms and conditions, please refer to enclosed warranty statement. Warranty is void unless installed by a licensed electrician.

**Complies with Australian Standards
AS/NZS60669.2.1**

SHIPPING

Packaging size	305mm x 275mm x 205mm
Carton quantity	200 pcs
Gross weight	5kg

AVAILABLE COLOURS



Model	Colour	Barcode
MTD350VAR	White	 9312375906193
MTD350VAP	White	 9312375906186

**THIS PRODUCT MUST BE
INSTALLED BY A LICENSED
ELECTRICIAN ACCORDING TO
AS/NZS 3000**

* Load dependent. Final performance may vary according to actual LED globe and transformer/driver used. Must be installed by a licensed electrician. Not suitable for fans and other inductive loads.